



# TRZ-16

**Lawn Mower Zero Turn 16 HP**

# TECHNICAL SPECIFICATIONS TRZ-16


<b>MOTOR</b>	<b>BRIGGS-STRATTON</b>
<b>Model</b>	Vanguard
<b>N° Cylinders</b>	2
<b>HP</b>	16 HP (11,76 Kw)
<b>Displacement</b>	530 cc
<b>Air filter</b>	BRIGGS-STRATTON
<b>Start</b>	Electric / Alternator 12V/10MH
<b>TRANSMISSION</b>	Double hydrostatic pump – one pump for each wheel moves an engine with direct transmission
<b>Pumps</b>	Hydro Gear 10 cc
<b>Hydraulic motors</b>	Orbital 200 cc
<b>Filter</b>	FA 110 C10 B400
<b>Working speed</b>	From 0 to 11,5 km/h – from 0 to 8 km/h in reverse
<b>Turning</b>	Double lever control Each lever controls one motor – independent control of speed and rotation
<b>Turning radius</b>	0° - Radius equals length of mower Wheels can rotate in reverse
<b>Brakes</b>	Hydrostatic
<b>Parking brakes</b>	Mechanical – When levers are in center
<b>Front wheel</b>	11x4,00 – five thread lined
<b>Rear wheels</b>	18x8,5 – 8 round garden thread
<b>EQUIPMENT</b>	
<b>Safety</b>	Safety sensor with operator on board Connected to traction and blade movement Rear rollers
<b>Seat</b>	Adjustable with armrest
<b>Controls</b>	Motor start – accelerator – air closure – key contact Hour counter- push button– drink carrier
<b>Optionals</b>	Mulching set – claw wheels
<b>MOWER SPECIFIC.</b>	Four roller anti-scalp
<b>Blade clutch</b>	Electromagnetic clutch
<b>Mower height</b>	10,1 cm
<b>Cutting height</b>	120 cm
<b>Blades</b>	Nr.3 diam.400 thickness 6,5 high ventilation – tangential speed 94 m/s
<b>Cutting height</b>	Raising of cutting element with right pedal – two lateral springs Pin regulation – safety block
<b>Blade hubs</b>	Diameter 25 mm – double sealed bearings+greasers
<b>DIMENSIONS</b>	
<b>Fuel tank</b>	29 lt
<b>Hydraulic oil tank</b>	5 lt
<b>Weight - Dimension</b>	370 kg



*Right side*



*Back side*

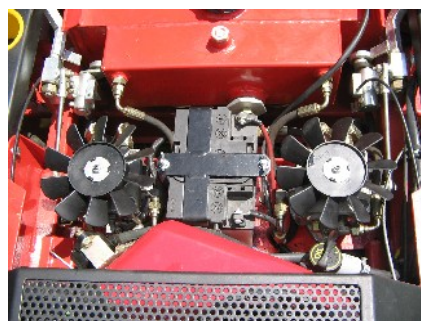

*Double hydrostatic pump – one pump for each wheel moves an engine with direct transmission.*



*Nr.3 blades diam.400 thickness 6,5 high ventilation – tangential speed 94 m/s*

**Manufacturer:**

**De Cloet S.r.l.**

Sede e stabilimento:

Via A. Bucchi, 2 - Zona Industriale Nord

06012 Città di Castello (Perugia) ITALY

P.I. 02267000541

Tel.+39 075.8521881 – Fax +39 075.8521439

e-mail: [info@decloet.it](mailto:info@decloet.it) <http://www.decloet.it>

**Dealer:**